

Main Parts. DIY.

Hitches



1/2 Inch
Ref: 1810ICC1210



3/8 Inch
Ref: 1810ICC3820




5/16 Inch
Ref: 1810ICC51630




Plano
Ref: 1810ICCPL40

- Manufactured in ABS high quality
- ROHS certification ABS construction
- Test Report HF380 on plastics materials in contact to food products


Bodies Probes




Model A



Model B



Model C



Model D

- ❖ Manufactured in ABS high quality
- ❖ ROHS certification ABS construction
- ❖ Declaration of Conformity for tips AISI-304
- ❖ PVC Cable AENOR certification
- ❖ Test Report on materials HF380 plastics in contact with foodstuffs

Model A: Simple terminal

- ❖ Length 55cm: 30ICS05540-10
- ❖ Length 130cm: 30ICS13040-10

Model B: Terminal FASTON without protection

- ❖ Length 55cm: 30ICS05520-10
- ❖ Length 130cm: 30ICS13020-10


Model C: Terminal FASTON with red protection

- ❖ Length 55cm: 30ICS05530-10
- ❖ Length 130cm: 30ICS13030-10

Model D: Terminal FASTON with white protection

- ❖ Length 55cm: 30ICS05510-10
- ❖ Length 130cm: 30ICS13010-10

Connections for probes



Internal clamp
Ref: 1810ICINTERM





External clamp
Ref: 1810ISEPOPCION

- Manufactured in ABS high quality
- ROHS certification ABS construction
- Test Report HF380 on plastics materials in contact to food products

Completed units

How to choose a finished probe?

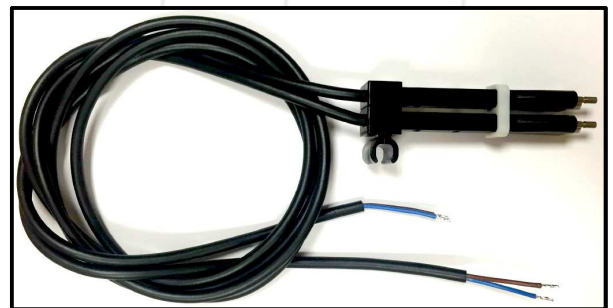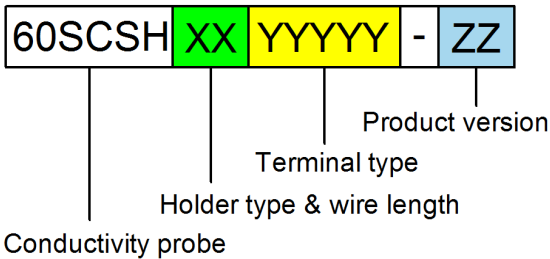

Example: 60SCSH1NPUNT-20

We have over a hundred combinations of probes available

XX	Holder type & wire length
1	Probe with holder 3/8", probe wire 2x0,75 - L130cm
2	Probe with holder 5/16", probe wire 2x0,75 - L130cm
3	Probe with holder 3/8", probe wire 2x0,75 - L55cm
4	Probe with holder 1/2", probe wire 2x0,75 - L130cm
5	Probe with holder 5/16", probe wire 2x0,75 - L55cm
6	Probe with holder 1/2", probe wire 2x0,75 - L55cm
7	Flat holder probe, probe wire 2x0,75 - L130cm
8	Flat holder probe, probe wire 2x0,75 - L55cm

YYYYY	Terminal type
N	Standard Faston terminal with white protection
SP	Standard Faston terminal without protection
NPR	Standard Faston terminal with red protection
NPUNT	Simple terminal

ZZ	Product version
10	Simple probe
20	Double probe

Our R&D has the ability to design and develop a device to your needs

Now you do not need to fit your device. Our device will suit you!



TEMPERATURE PROBES

DINFER ELECTRONICS

Temperature probes

NTC 6K8

Ref:60STNTC6K8T2-00



- ❖ Temperature sensor NTC
- ❖ Built in thermoplastic elastomer rubber
- ❖ Corrosion resistant
- ❖ Nominal value 6K8 Ω a 25C/Beta 3977
- ❖ effective temperature range -50 a 105C
- ❖ Tolerance 2%
- ❖ Dimensions 2 x 0,25mm²/1500mm

NTC 10K

Ref:60STNTC10KT1-00



- ❖ Temperature sensor NTC
- ❖ Built in thermoplastic elastomer rubber
- ❖ Corrosion resistant
- ❖ Nominal value 6K8 Ω a 25C/Beta 3977
- ❖ effective temperature range -50 a 105C
- ❖ Tolerance 2%
- ❖ Dimensions 2 x 0,25mm²/1500mm

ADDITIONAL INFORMATION

Our probes can be supplied with other lengths that suit your need.
See our sales department to set their needs.

Our R&D has the ability to design and develop a device to your needs

Now you do not need to fit your device. Our device will suit you!

